

GUARD LOAD ARREST



LOAD ARRESTORS

FEATURES

- MWL from 150 to 1,500 kg / 330 to 3300 lbs
- Rope lengths up to 25 m / 82 ft
- Shock absorption minimises damage
- Fall indicator lens for easy monitoring
- Galvanized or stainless steel rope options
- Rope automatically extends / retracts



GUARD300-25
GUARD500



GUARD800
GUARD1000
GUARD1500



GUARD150
GUARD300-10

INFORMATION

Guard load arrestors are heavy-duty fall arrest blocks for protecting equipment that is suspended at height.

What is a load arrestor?

Load arrestors provide a secondary safety back-up for overhead loads, used in conjunction with a primary lifting device or support, such as a hoist or fixed anchorage. If the primary support fails, the load arrestor will automatically stop the load from falling, thereby preventing damage to the load and, more importantly, protecting people below.

Guard load arrestors have a high-strength retractable rope that extracts and retracts, following the movement of the load. This means Guards can be fitted to equipment that needs to be moved (dynamic loads), as well as to non-moving (static) loads.


#GuardAgainstGravity

Name	Product Code	Maximum Working Load		Minimum Working Load		Rope Length		Wire Rope Material	Minimum Anchor Strength		Maximum Running Speed	
		kg	lbs	kg	lbs	m	ft		kN	lbf	m s ⁻¹	ft s ⁻¹
GUARD150	GUARD150-14G	150	330	10	22	14	46	Galvanised Steel	7.4	1,663	1	3.280
	GUARD150-14S	150	330	10	22	14	46	Stainless Steel	7.4	1,663	1	3.280
GUARD300	GUARD300-10G	300	660	50	110	10	33	Galvanised Steel	14.1	3,169	0.7	2.297
	GUARD300-10S	300	660	50	110	10	33	Stainless Steel	14.1	3,169	0.7	2.297
	GUARD300-25G	300	660	50	110	25	82	Galvanised Steel	14.1	3,169	0.7	2.297
	GUARD300-25S	300	660	50	110	25	82	Stainless Steel	14.1	3,169	0.7	2.297
GUARD500	GUARD500-10S	500	1,100	100	220	10	33	Stainless Steel	20.6	4,631	0.7	2.297
	GUARD500-24S	500	1,100	100	220	24	79	Stainless Steel	20.6	4,631	0.7	2.297
	GUARD500-10G	500	1,100	100	220	10	33	Galvanised Steel	20.6	4,631	0.7	2.297
	GUARD500-24G	500	1,100	100	220	24	79	Galvanised Steel	20.6	4,631	0.7	2.297
GUARD800	GUARD800-10S	800	1,760	150	330	10	33	Stainless Steel	45.1	10,123	0.6	1.969
GUARD1000	GUARD1000-10G	1000	2,200	150	330	10	33	Galvanised Steel	45.1	10,123	0.6	1.969
GUARD1500	GUARD1500-10G	1500	3,300	200	440	10	33	Galvanised Steel	63.3	14,230	0.6	1.969


INSTALLATION EXAMPLES



Single Hoist

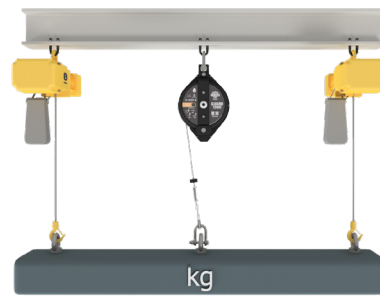

Multiple hoists

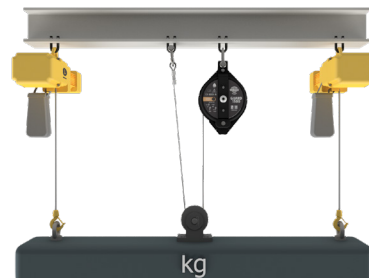

Pulley

ACCESSORIES




Holdall bag
GSE-H/ALL

**Protect loads from 150 kg
to 1500 kg**



Fall indicator for easy monitoring

#GuardAgainstGravity

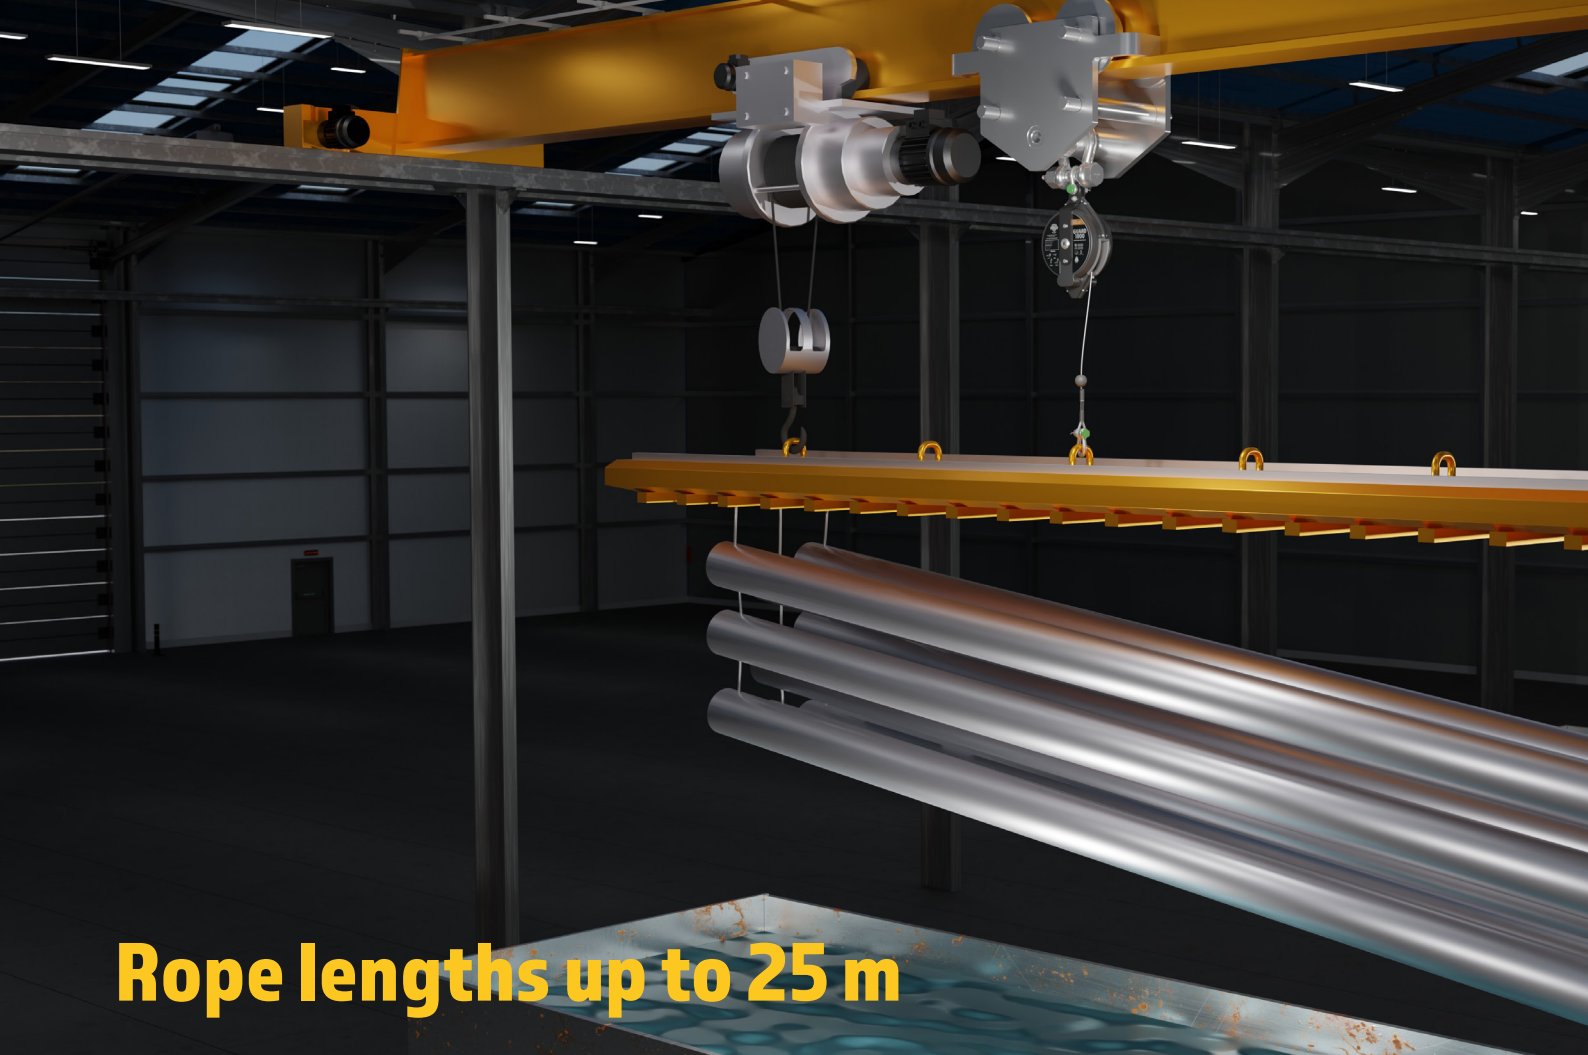

Rope lengths up to 25 m



**Galvanised or
stainless steel
rope options**